

HYDRUS

Ultrasonic Meter

DIEHL
Metering



APPLICATION

Static ultrasonic water meter for accurate measuring and recording for all applications of water supply.

FEATURES

- ▶ Ultrasonic water meter with long-term stability under difficult conditions (no measurement of air and insensitive against sedimentation)
- ▶ Higher performance than class D requirements
- ▶ Metrological class 2 and dynamic range up to R 400
- ▶ Compliant with MID, OIML R49 and EN 14154
- ▶ Mounting in any installation position, no calming sections required
- ▶ Housing with thread connection lead-free brass
- ▶ IP68 suitable for outdoor installations
- ▶ Certified for drinking water (KTW and ACS)
- ▶ Wired M-Bus, Radio OMS, Radio/L-Bus and Pulse interface available
- ▶ Radio communication based on Open Metering telegram (OMS-Generation 3, Profile A, or OMS-Generation 4, Profile B, selectable)
- ▶ Highest data security for AMR communication
- ▶ Displaying of error- and alarm codes, including leakage detection
- ▶ Battery lifetime up to 16 years
- ▶ Data logging capabilities to record up to 1.024 daily values + 32 configurable values (hourly, daily, weekly, monthly) and an annual due date

HYDRUS

Ultrasonic Meter

GENERAL

		HYDRUS	
Medium temperature range	°C	0.1 ... 90	
Ambient operating temperature	°C	1 ... 70	
Ambient storage temperature	°C	-20 ... +70 (>35 °C max. 4 weeks)	
Nominal pressure	PN	bar	16
Power supply	Two 3.6 VDC lithium-batteries (only one battery with M-Bus possible)		
Battery lifetime T30 ¹ /T50 ¹	Up to 12 years (one battery), up to 16 years (two batteries)		
Battery lifetime T90 ¹	Up to 12 years (all interfaces)		
Interfaces	Optical, radio 434 or 868 MHz, M-Bus, L-Bus, pulse		
Data storage	For events and for consumption values		
Protection class	IP 68		

¹ depends on the sending interval of the radio telegram, the telegram length and the ambient temperature at the installation

TECHNICAL DATA DISPLAY

		HYDRUS	
Display indication	LCD, 8-digit		
Units DN 15 - DN 32	Flow and volume (m ³ + 3 digits after the comma)		
Units DN 40 + DN 50	Flow (m ³ + 3 digits after the comma); Volume (m ³ + 2 digits after the comma)		
Values displayed (depending on configuration)	Volume ² - flow - mediums temperature - display test ² - current error and alarm status ² - date - primary and secondary address - radio signal ON/OFF - battery lifetime ² - accounting day - error hour counter - pulse values - software checksum ²		

² Display according to approval (always on)

INTERFACES - OVERVIEW

		HYDRUS	
Optical	For configuration of display information and radio telegram, to switch to the various display loops		
Radio	434 or 868 MHz, real data telegram (configurable), Open Metering Standard (OMS-Generation 3, Profile A, or OMS-Generation 4, Profile B, selectable)		
M-Bus	2400 Baud (adjustable to 300 Baud), configurable telegram, cable length 1.5 m, power supply only via built-in battery		
L-Bus	In combination with radio, cable length 1.5 m		
Pulse (Open collector)	Two configurable pulse outputs, cable length 1.5 m		

VOLUME- / PULSE OPEN COLLECTOR

		HYDRUS	
Max. input voltage	V	30	
Max. input current	mA	27	
Max. voltage drop at active output	V/mA	2/27	
Max. current through inactive output	µA/V	5/30	
Max. reverse voltage without destroying outputs	V	6	
Pulse rates	I/pulse	Decadic 0.1 ... 100	
Pulse output 1 variants	Total volume or forward volume		
Pulse output 2 variants	Forward volume, direction ³ or error		
Pulse duration	Depending on device configuration ⁴		
Pulse break	Depending on device configuration ⁴		
Pulse frequency	Depending on device configuration ⁴		

³ when total volume on pulse output 1, only direction possible on pulse output 2

⁴ detailed description on request

HYDRUS^{DN 15 - 20}

Ultrasonic Meter

TECHNICAL DATA 5 6

Permanent flow rate	Q ₃	m ³ /h	2.5	2.5	4 ⁷	4	4	4
Nominal diameter	DN	mm	15	15	20 ⁷	20	20	20
Overall length	L	mm	110	165	110 ⁷	130	175	190
Overload flow rate	Q ₄	m ³ /h	3.125	3.125	5	5	5	5
Transitional flow rate	Q ₂	l/h	16	16	25.6	25.6	25.6	25.6
Minimum flow rate	Q ₁	l/h	10	10	16	16	16	16
Starting flow rate		l/h	2.6	2.6	4.3	4.3	4.3	4.3
Pressure loss at Q ₃		bar	0.33	0.33	0.3	0.3	0.3	0.3

⁵ at dynamic range R 250


⁶ further overall lengths on request

⁷ substitute for body length 105 mm rising pipe

APPROVAL

		DN 15 - 20
Approval		MID LNE 14586, OIML R49, EN 14154, TVO, KTW, ACS
Dynamic range (Q ₃ /Q ₁) - Q ₃ 1.6 m ³ /h (T30 - T50)	R	160 / 200 / 250
Dynamic range (Q ₃ /Q ₁) - Q ₃ 2.5 m ³ /h (T30 - T50)	R	160 / 200 / 250 / 315 / 400
Dynamic range (Q ₃ /Q ₁) - Q ₃ 4 m ³ /h (T30 - T50)	R	160 / 200 / 250
Dynamic range (Q ₃ /Q ₁) - Q ₃ 1.6 - 4 m ³ /h (T90)	R	160 / 200


DIMENSIONS

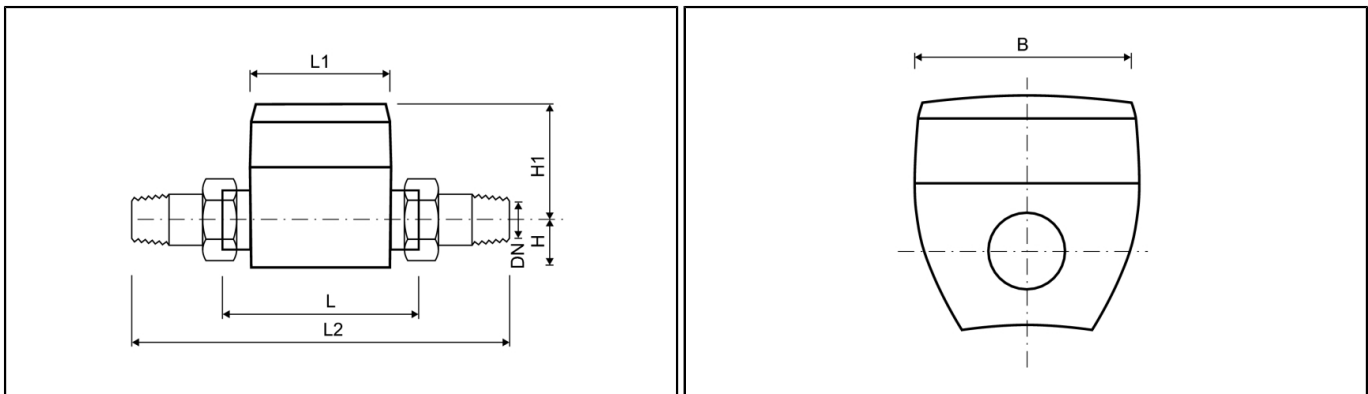


Permanent flow rate	Q ₃	m ³ /h	2.5	2.5	4 ⁷	4	4	4
Nominal diameter	DN	mm	15	15	20 ⁷	20	20	20
Overall length	L	mm	110	165	110 ⁷	130	175	190
Counter length	L1	mm	88	88	88	88	88	88
Counter width	B	mm	94	94	94	94	94	94
Overall length with coupling	L2	mm	190	245	210	230	295	290
Connection thread on meter		Inch	G ³ / ₄ B	G ³ / ₄ B	G1B	G1B	G1 ¹ / ₄ B	G1B
Connection thread of coupling		Inch	R ¹ / ₂	R ¹ / ₂	R ³ / ₄	R ³ / ₄	R1	R ³ / ₄
Height	H1	mm	67	67	65	65	65	65
Weight without coupling (approx.)		kg	0.8	1	0.9	0.9	1.1	1.1
Weight with coupling (approx.)		kg	1	1.4	1.3	1.3	1.7	1.5
Height	H	mm	32	32	34	34	34	34

⁷ substitute for body length 105 mm rising pipe

PRESSURE LOSS GRAPH / TYPICAL ERROR GRAPH

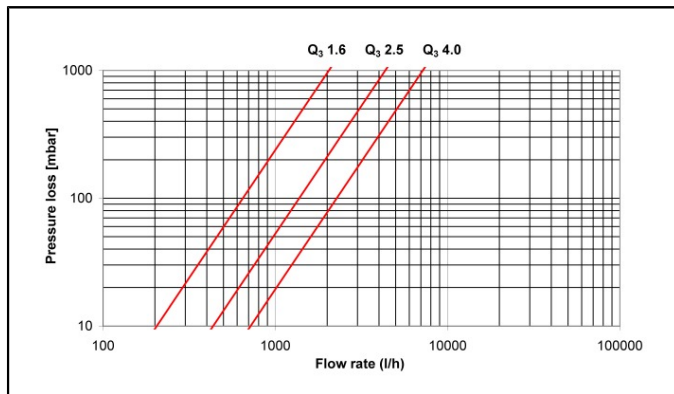

Pressure loss graph

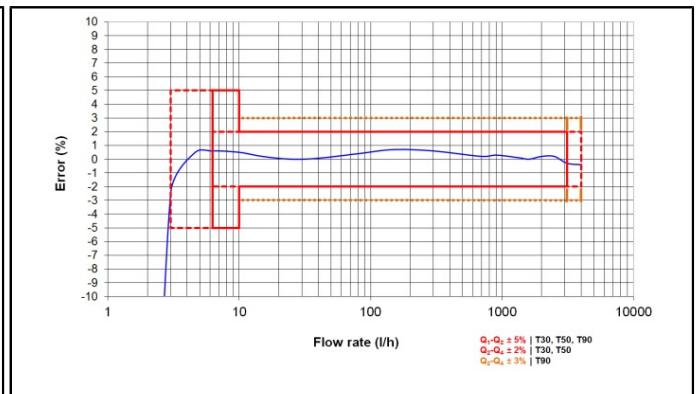

Typical error graph

HYDRUS^{DN 25 - 50}

Ultrasonic Meter

TECHNICAL DATA 5 6

Permanent flow rate	Q ₃	m ³ /h	4	6.3	10	10	10	10
Nominal diameter	DN	mm	25	25	25	25	25	25
Overall length	L	mm	175	260	135	150	175	260
Overload flow rate	Q ₄	m ³ /h	5	7.87	12.5	12.5	12.5	12.5
Transitional flow rate	Q ₂	l/h	25.6	50.4	80	80	80	80
Minimum flow rate	Q ₁	l/h	16	31.5	50	50	50	50
Starting flow rate		l/h	4.3	10	10	10	10	10
Pressure loss at Q ₃		bar	0.3	0.25	0.55	0.55	0.55	0.55
Permanent flow rate	Q ₃	m ³ /h	10	16	16	25	25	
Nominal diameter	DN	mm	32	40	40	50	50	
Overall length	L	mm	260	200	300	270	300	
Overload flow rate	Q ₄	m ³ /h	12.5	20	20	31.25	31.25	
Transitional flow rate	Q ₂	l/h	80	128	128	200	200	
Minimum flow rate	Q ₁	l/h	50	80	80	125	125	
Starting flow rate		l/h	10	16	16	25	25	
Pressure loss at Q ₃		bar	0.55	0.4	0.4	0.25	0.25	

⁵ at dynamic range R 200

⁶ further overall lengths on request

APPROVAL

DN 25 - 50		
Approval		MID LNE 14586, OIML R49, EN 14154, TVO, KTW, ACS
Dynamic range (Q ₃ /Q ₁) - Q ₃ 6.3 m ³ /h (T30 - T50)	R	40 / 80 ⁷ / 160 / 200
Dynamic range (Q ₃ /Q ₁) - Q ₃ 10 m ³ /h (T30 - T50)	R	40 / 80 ⁷ / 160 / 200 / 250
Dynamic range (Q ₃ /Q ₁) - Q ₃ 16 m ³ /h (T30 - T50)	R	40 / 80 / 160 / 200 / 250 / 315 ⁸ / 400 ⁸
Dynamic range (Q ₃ /Q ₁) - Q ₃ 25 m ³ /h (T30 - T50)	R	40 / 80 / 160 / 200 / 250 / 315 / 400
Dynamic range (Q ₃ /Q ₁) - Q ₃ 6.3 - 25 m ³ /h (T90)	R	40 / 80 / 160


⁷ variant DN 25 with body length 135 mm and 150 mm only in R 80

⁸ not for DN 50

HYDRUS^{DN 25 - 50}

Ultrasonic Meter

DIMENSIONS

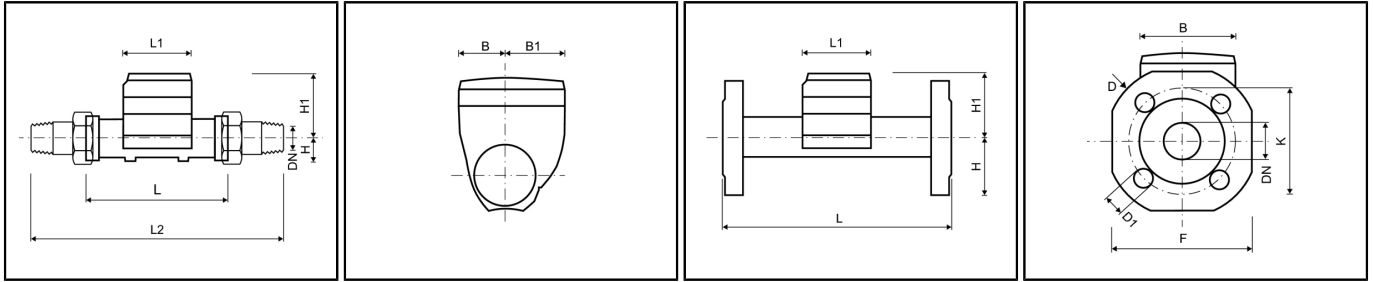


Permanent flow rate	Q ₃	m ³ /h	4	6.3	10	10	10	10
Nominal diameter	DN	mm	25	25	25	25	25	25
Overall length	L	mm	175	260	135	150	175	260
Counter length	L1	mm	88	92	92	92	92	92
Counter width	B	mm	94	94	94	94	94	94
DIMENSIONS - THREAD								
Overall length with coupling	L2	mm	295	380	255	270	295	380
Connection thread on meter		Inch	G1¼B	G1¼B	G1¼B	G1¼B	G1¼B	G1¼B
Connection thread of coupling		Inch	R1	R1	R1	R1	R1	R1
Height	H1	mm	65	84	84	84	84	84
Weight without coupling (approx.)		kg	1.1	1.6	1.17	1.24	1.29	1.6
Weight with coupling (approx.)		kg	1.7	2.2	1.77	1.84	1.89	2.2
Height	H	mm	34	26	26	26	26	26
DIMENSIONS - FLANGE								
Flange diameter	D	mm		115	-	-	-	115
Hole circle diameter	K	mm		85	-	-	-	85
Number of screwholes		pcs		4	-	-	-	4
Screwhole diameter	D1	mm		14	-	-	-	14
Height	H	mm		50	-	-	-	50
Height	H1	mm		84	-	-	-	84
Width	F	mm		100	-	-	-	100
Weight with flanges (approx.)		kg		3.45	-	-	-	3.45

HYDRUS^{DN 25 - 50}


Ultrasonic Meter

Permanent flow rate	Q ₃	m ³ /h	10	16	16	25	25
Nominal diameter	DN	mm	32	40	40	50	50
Overall length	L	mm	260	200	300	270	300
Counter length	L1	mm	92	92	92	92	92
Counter width	B	mm	94	94	94	94	94
DIMENSIONS - THREAD							
Overall length with coupling	L2	mm	380	340	440	390	420
Connection thread on meter		Inch	G1½B	G2B	G2B	G2½B	G2½B
Connection thread of coupling		Inch	R1¼	R1½	R1½	R2	R2
Height	H1	mm	84	87	87	90	90
Weight without coupling (approx.)		kg	1.8	2.42	3.05	3.9	4,05
Weight with coupling (approx.)		kg	2.4	3.62	4.25	5.5	5,65
Height	H	mm	26	31	31	41	41
DIMENSIONS - FLANGE							
Flange diameter	D	mm	140	-	148	163	163
Hole circle diameter	K	mm	100	-	110	125	125
Number of screwholes		pcs	4	-	4	4	4
Screwhole diameter	D1	mm	18	-	18	18	18
Height	H	mm	62.5	-	69	73.5	73.5
Height	H1	mm	84	-	87	90	90
Width	F	mm	125	-	138	147	147
Weight with flanges (approx.)		kg	4.7	-	6.67	7.23	7.47

PRESSURE LOSS GRAPH / TYPICAL ERROR GRAPH

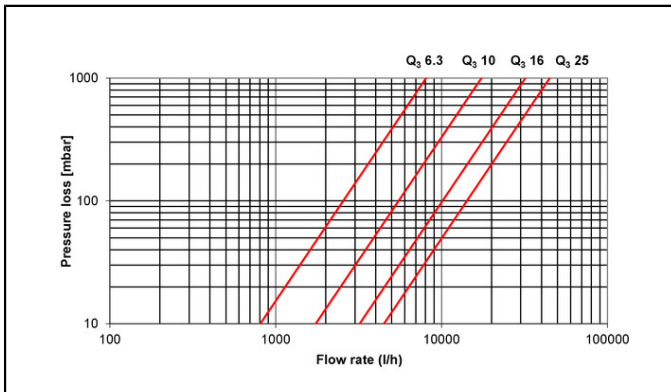

Pressure loss graph

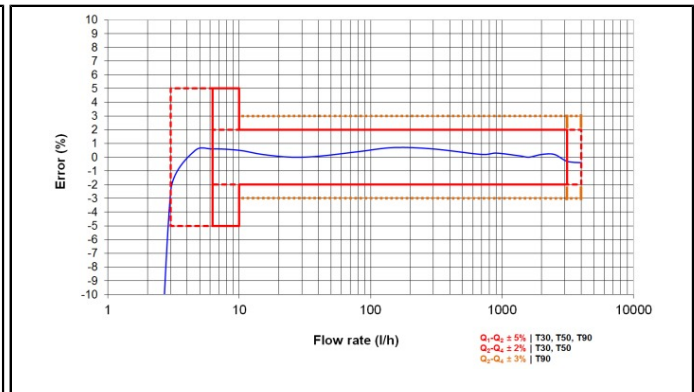

Typical error graph