

ALTAIR V3

EWT

Rotary Piston Meter



APPLICATION

ALTAIR water meter is characterized by its versatility. Its large measuring chamber means that it can be used for submetering or as a main meter. Additionally, it is suitable for different types of water.

ALTAIR is a modular meter and therefore can be fitted at any time with IZAR RADIO reading system, IZAR DOSING or the pulse emitter IZAR PULSE, gateway to other systems.

FEATURES

- ▶ DN 15 to DN 40
- ▶ Start flow rate 2 l/h for DN 15
- ▶ Low head loss
- ▶ Installation in all position
- ▶ New register with modularity "Ha + Ti"
- ▶ Glass/Metal register in option
- ▶ MID to R=500
- ▶
- ▶ High dynamic range

ALTAIR V3

Rotary Piston Meter

METROLOGICAL DATA

Nominal diameter	DN	mm	15	15	20	25	32	40
Length*	L	mm	110	170	190	260	260	300
Nominal flowrate	Q ₃	m ³ /h	2.5	2.5	4	6.3	10	16
R*	Q ₃ /Q ₁		160	160	160	160	160	160
Starting flowrate		l/h	2	2	2	3	3	3
Min. constructor's flowrate		l/h	5	5	5	20	40	40
Min. flowrate	Q ₁	l/h	15.6	15.6	25	39.4	62.5	100
Transition flowrate	Q ₂	l/h	25.0	25.0	40	64	100	160
Maximum flowrate	Q ₄	m ³ /h	3.12	3.12	5	7.87	12.5	20
Max. constructor's flowrate		m ³ /h	7	7	7	10	20	20

* Other value on request


APPROVAL

ALTAIR V3	
MID approval	LNE-5582
Alimentarity	ACS-WRC-KTW

TEMPERATURE AND PRESSURE

ALTAIR V3		
Medium temperature range	°C	0..30
Nominal pressure	NP bar	16

DIMENSIONS

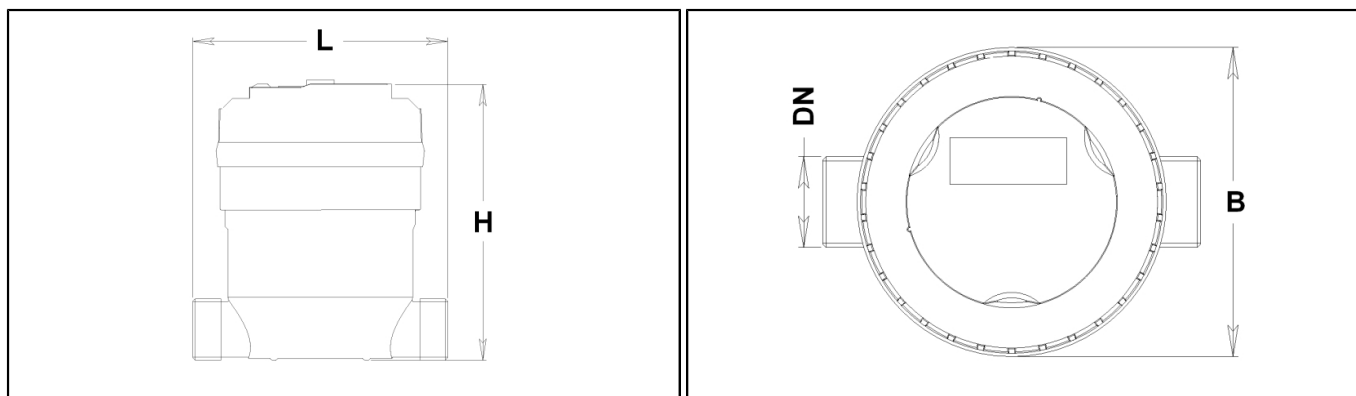


Nominal diameter	DN	mm	15	15	20	25	32	40
Length*	L	mm	110	170	190	260	260	300
Width	B	mm	90	90	90	170	170	170
Height	H	mm	122	127	127	190	190	190
Thread connections standard		inch	3/4"	3/4"	1"	1 1/4"	1 1/2"	2"
Thread connections (in option)		inch	-	-	-	-	1 1/4"	-
Weight		kg	1.05	1.2	1.34	5.15	5.25	5.45

* Other value on request

ALTAIR V3

Rotary Piston Meter

PRECISION CURVE

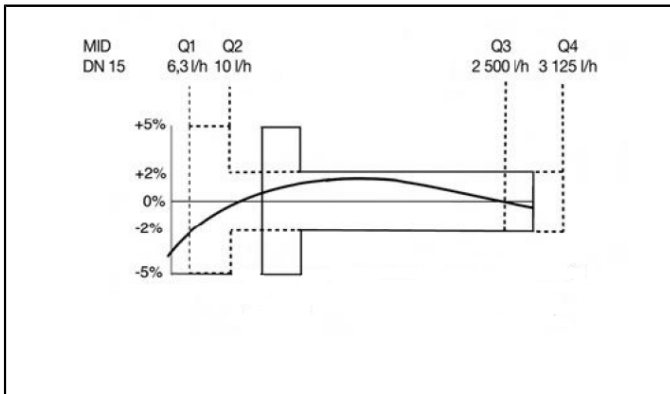

HEAD LOSS (DELTA P = Q²/KVS²)

Nominal diameter	DN	mm	15	15	20	25	32	40
Length*	L	mm	110	170	190	260	260	300
Kvs			4.24	4.24	5	16.97	16.97	20

OPTIONS

Pulse emitter IZAR PULSE : 1 impulse/liter

Non-return valve - Connector pair - Glass copper register